

## Compensateur de Dilatation


**Réf :  
290 162**

### INOX

- » MÉTALLIQUE
- » AVEC TIRANTS

- » BRIDES
- » ISO PN16

- » TMS : 300°C (1)
- » PMS : 16B

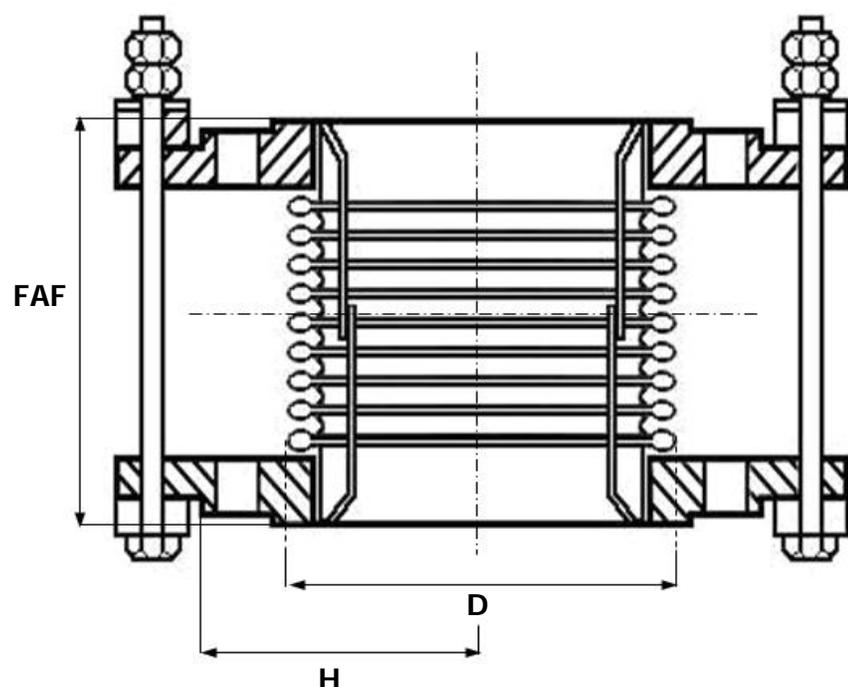

CORPS / BODY	INOX 304
CHEMISE INTERNE / INNER SLEEVE	INOX 304
BRIDES / FLANGES	ACIER E24
BOULONS / TIE ROD	ACIER E24

- BRIDES INOX 304 - REF : 290 163

DN	8	10	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
INCHES	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
FAF								150	150	150	150	150	150	200	200	200						
FAF Minimum								160	160	160	160	160	158	208	208	208						
FAF Maximum								130	130	130	130	130	125	170	165	165						
H								83	92	100	110	125	145	170	202	230						
D								70	86	101	125	156	183	234	284	341						
MASSE								6,5	8	8,8	9,8	14	17,5	23,5	33	38						

Unités : mm, Kg.